

USER'S GUIDE




Four steps to install Sprint Booster



1 1. Wait for 5 minutes while the driver's door is open and the engine switch is turned off.

5 minutes

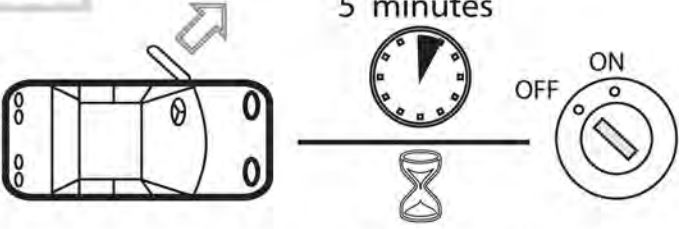


" This is necessary to avoid the check lamp going on."

IMPORTANT!
Make sure that your car's switch is off (no ignition) for at least 5 minutes before install the device. During this time the car is checking the electronic systems of the car through the CAN BUS system, this time usually varies between different vehicles but in any case it should not be more than 5 minutes. If you connect the Sprint Booster (or any other device) during this „cooldown“ period, an error signal occurs no matter what.

Accelerator Pedal →


2

2. Unplug the OEM connector from the accelerator pedal.

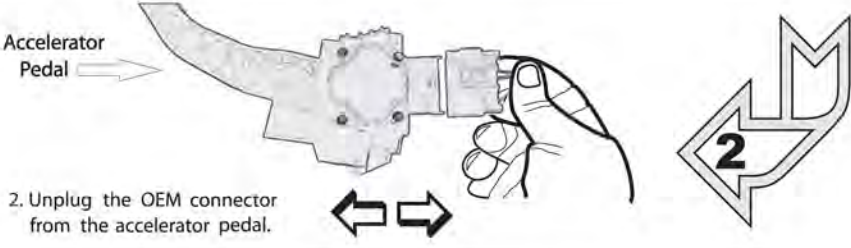


3


3. Connect carefully the Sprint Booster to accelerator pedal, making sure that is in the right orientation, as shown at the drawing.

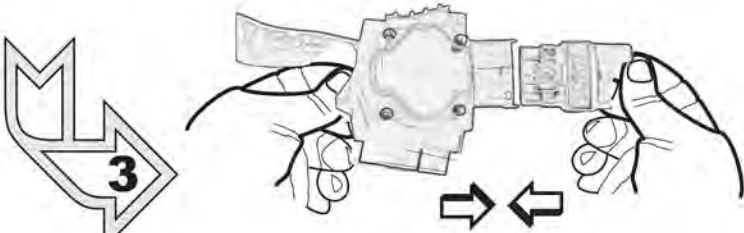

4

4. Connect the OEM connector to the free side of Sprint Booster. Make sure all connections are firmly in place.

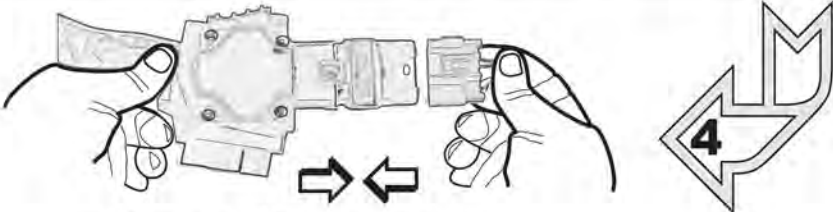

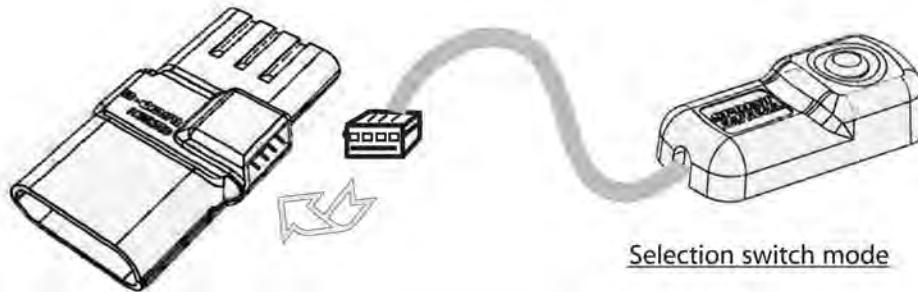

	<p><u>Red Light</u></p>	<p>Sprint Booster is now programmed for <u>maximum</u> acceleration, that is recommended for sport driving.</p>
	<p><u>Green Light</u></p>	<p>Sprint Booster is now programmed for <u>medium</u> acceleration, that is recommended for soft driving (the acceleration is significant improved compared to factory performance.)</p>
	<p><u>No Light</u></p>	<p>Sprint Booster is <u>OFF</u>. The vehicle's acceleration is now back to factory performance.</p>
		<p>If you wish, you may adjust the <u>Sprint Booster</u> the way you want using the switch and then <u>remove</u> it. The <u>Sprint Booster</u> will save and operate the last settings.</p>



CAUTION

- Never press the switch while pressing the accelerator pedal
- After the installation of Sprint Booster, the response and the behavior of your acceleration will be significantly faster. Always be careful until you get used to the new behavior of your acceleration.
- Make sure that all connections are firmly in place after the installation
- Do not connect the selection switch of this device to another Sprint Booster device.
- In order to disconnect the switch from Sprint Booster you need to pull the switch's white terminal of the Sprint Booster Never pull the switch out from the wire.
- The installation of Sprint Booster requires special knowledge. We strongly recommend to consult a technician for proper and safe installation.
- These are general instructions applying to most of the vehicles.
In some vehicles installation may vary. For further information please contact our authorized dealer network.

BOULEKOS SA accepts no responsibility, in any manner whatsoever, for damage and/or trouble to your vehicle or product, nor for any accidents that are result of misuse of the product.